



Night latch and rim lock 防盗锁

外装门锁 NIGHT LATCHES AND RIM LOCKS

H101系列

• 简述 Introduction •

- * 锁壳是锌合金材料压铸，内部结构件为镀锌钢质材料。
- * 分别有双锁头、单锁头及安全型多种。
- * 防盗性强，安全可靠。
- * Zinc die-cast case, steel base internal components with zinc plated finish.
- * Double cylinders, single cylinder and self-locking performance.
- * Good guard against theft, high security.

• 特点 Features •

- * 门向
左开门或右开门均适用。
- * 适配门厚
1-3/8" 2-3/16" (35mm-55mm)。
- * 中心距
2-3/8" (60mm)
- * 锁扣板
常规配置直角式扣板，用于内开门。
亦可订做平式扣板，用于外开门。但通常不建议使用在外开门。
单锁头双扣(老虎)锁，可用钥匙和内执手启动锁舌，内侧按钮可锁死锁舌。
双锁头双扣(老虎)锁，内外侧均须用钥匙启动锁舌。
- * Handing
Fully reversible for left or right hand doors.
- * Door Thickness
1-3/8" 2-3/16" (35mm-55mm).
- * Backset
2-3/8" (60mm)
- * Strike
Angle strike as standard for doors opening inward.
Flat strike available for doors opening outward, though such opening is not recommended.
Single cylinder deadlock, key and inside knob operate latch, protected with an anti-picking slide gate.
Double cylinder deadlock, operated by key from both outside and inside.

564系列

• 简述 Introduction •

- * 564均是单舌结构。
- * 564锁壳是锌合金压铸，内部构件均是镀锌钢质材料。
- * 锌合金压铸单舌门锁是经济耐用的产品，适合在户外木门的安装。
- * 方舌门锁，防拨锁舌伸出长度为25mm(1")。
- * 564 is of bevel latch structure.
- * Outer case of 564 is made of zinc die-cast. Inner structure is made of zinc-plated steel.
- * Zinc die-cast night latch is an economical security product, suitable for installation on exterior wood doors.
- * Rim deadbolt, with the security of 1" (25mm) full throw deadbolt.

• 特点 Features •

- * 门向
左开门或右开门均适用。
564亦可安装在外开门上。
- * 适配门厚
常规配置35mm-55mm(1-3/8" 2-3/16")，亦可订购30-60mm(1-3/16" 2-3/8")。
- * 中心距
2-3/8" (60mm)。
单舌门锁，锁舌伸出长度为13mm(1/2")。内按钮锁死锁舌后，外面无法用钥匙或其他方法将门打开。
- * Handing
Fully reversible for left or right hand doors.
564 can also be installed on outward opening doors.
- * Door Thickness
1-3/8" 2-3/16" (35mm-55mm) is supplied as standard, lock suitable for 30mm-60mm door thickness is also available upon request.
- * Backset
2-3/8" (60mm)。
Night latch of 1/2" (13mm) latch extension, with inside deadlocking button preventing any key operation and latch picking from outside.



MODEL: 5836



MODEL: 5835



MODEL: H102



MODEL: H101



MODEL: F102

Night latch and rim lock 防盗锁



MODEL: 260



MODEL: 1073D
Double Cylinder Electric Rim Lock



MODEL: 1073S
Single Cylinder Electric Rim Lock



MODEL: 5688



MODEL: 5833



MODEL: 5689



MODEL: 5682



MODEL: G559



MODEL: 5834



MODEL: 5683



MODEL: 559



MODEL: 556



MODEL: 558



MODEL: 564



MODEL: S564

Grip handle set 套锁



MODEL:70750 PB
Brass handle



MODEL:70710 PB
Brass handle



MODEL:70610 AB
Material: Brass & Zinc alloy



MODEL:70720 PB
Brass handle



MODEL: 70780 AB
Brass handle



MODEL: 70710 SN
Brass handle



MODEL: 70720 SM
Brass handle

拉手套锁 ENTERANCE HANDLESET

• 简述 Introduction •

- * 大门上安装可产生高贵优雅的效果, 有各种不同的外饰设计和表面处理供选择。
- * 该产品可安装地普通的预制门孔上, 可取代原先安装的各类锁具。
- * 内部构件为钢制材料, 表面经防腐蚀处理。
- * 外拉手、外饰件及其他外露部件均为压铸铜或压铸锌合金制造。
- * Decorative handlesets are crafted to give an elegant touch to your entrance doors.
- * Handles are built to fit standard door preparations for typical knobsets.
- * Existing locks can be easily replaced by the handlesets different designs and finishes.
- Solid steel internal construction, all parts are corrosion protected.
- * External handles, trims and other exposed components are made of forged solid brass for added strength or zinc die-casting electro-plated.

• 特点 Features •

- * **防撬性强**
防锯保险舌, 使出长度为25mm(1")。
所有紧固件均不外露。
斜锁舌伸出长度12mm (1/2")。
锁外头圈盖可自由转动, 起防撬作用。
- * **安装简便**
在标准的51mm(2")的门孔上安装, 可取代多数原装的锁具。
斜舌及保险舌均为可调, 适用60mm(2-3/8")或70mm(2-3/4")中心距。
左开门和右开门均适用。
适装门厚为35mm(1-3/8")至45mm(1-3/4")。
- * **Extra Security**
Security deadbolt of full 1" (25mm) throw with hardened steel insert to resist sawing.
No exposed exterior fixings.
1/2" (13mm) latch bolt extension.
Free turning cylinder ring prevents wrenching.
- * **Ease of installation**
Installs in standard 2"(51mm) cross bore, replaces most existing locksets.
Both the latch and the deadbolt are adjustable for 2-3/8" or 2-3/4" (60mm or 70mm) backset.
Non-handed can be installed on either left hand or right hand doors.
Adjustable for doors from 1-3/8" to 1-3/4" (35mm to 45mm) thickness.

Stainless steel handle 不锈钢插芯锁



Total solutions to the building industry



MODEL:9020S



MODEL:9014S



MODEL:9004S



MODEL:9005S



MODEL:9006S



MODEL:9008S



MODEL:9004



MODEL:9001



MODEL:9002E



MODEL:9011E



MODEL:NC046



MODEL:NC013



Total solutions to the building industry

Stainless steel handle 不锈钢插芯锁



MODEL:9007E



MODEL:9005E



MODEL:9015



MODEL:9008E



MODEL:9003E



MODEL:9010E



MODEL:LH1033 SS



MODEL: 9014



MODEL:9082E



MODEL:NC182



MODEL:NC053



MODEL:NCB



MODEL:NCD



MODEL:NC181



MODEL:NC068



Stainless steel handle 不锈钢插芯锁



MODEL: DH01 SC



MODEL: DH02 SC



MODEL: DH02 CP



MODEL: DH02 AB



MODEL: 968 SS



MODEL: DH02 CP



MODEL: DH02 PB



MODEL: DH02 PB



MODEL: LH1085



MODEL: LH1086



MODEL: LH1086 BK



MODEL: LH1087



MODEL: LH1088



MODEL: 9087 SS

Lock case 锁体



Lc09 85×60mm



Lc07 85×45mm
3 Latches




Lc21 85×50mm



Lc02 85×40mm



Lc16
50mm backset

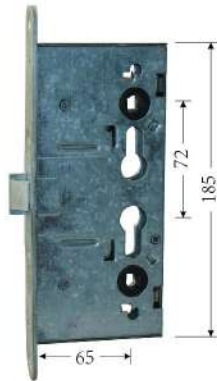

Lc31
Security Lock



Lc32 65×72mm
Security Lock



Lc33-5572
Panic Exit Lock




Lc04 85×60mm
3 Latches



Lc14 85×50mm



Lc6860
Security Lock

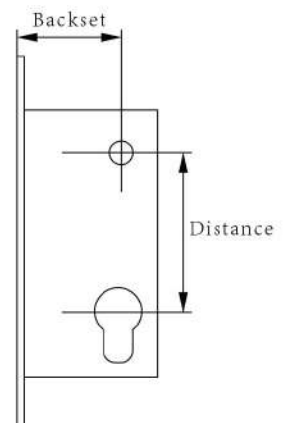

85 series 85系列											72 series 72 系列				
Center distance	85	85	85	85	85	85	85	85	85	85	72	72	72	72	72
backset	20	25	30	35	40	45	50	55	60	70	40	45	50	55	60

Function available: Entrance, Anti Panic, Privacy, Passage, Store room, Dead lock, Class room, Multi function
Stainless steel strike plate, stainless steel latch face.
Latch is made of solid brass, square latch is made of zinc or brass.

	4 round bolts security lock case	Hook lock case Stainless steel latch	Small size lock case		
Center distance	85mm		50mm	50mm	40mm
backset	50mm	20mm	40mm	45mm	50mm

We also have other irregular lock case type for choice, we do R&D for different dimension lock case, Welcome ODM and OEM.



Total solutions to the building industry

Lock case 锁体



Lc04 8560



Lc8535



Lc8525



Lc8530BK



Lc8530PS



Lc15
Hook Lock
backset 20mm



Lc17
Hook Lock
backset 16mm



AI8530
Aluminum security Lock



Lc8525B



Lc18



Lc19




Lc20




Total solutions to the building industry

Lock case 锁体

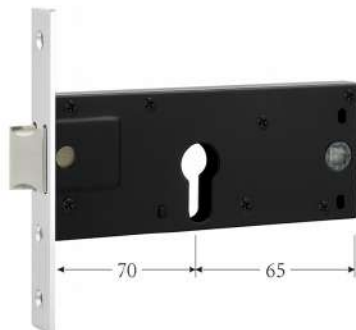

Lc7065S

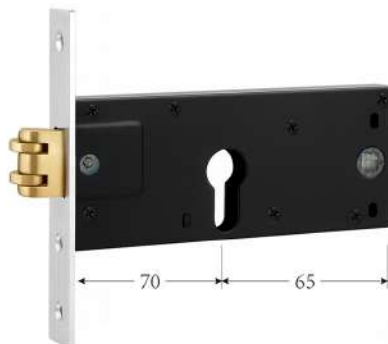

Lc7065PS



Lc7065



Lc9045



LC04 85x60



HY-0SS
304 Stainless Steel
Door Latch Guard



HY008



HY006 ET



HY007

Profile Cylinder 锁芯



Total solutions to the building industry



45×45BSKT



35×35BSKT



35×35PBKT



30×30PBKT



40×40BSKK



40×40SNKT



35×35SNKT



30×30SNKT



35×35BSKK



45×45SNKK



35×35SNKK



30×30SNKK




47BSIK

Single & Double Side open.

Finish : PB. CP. SS. SC. AB. AC

3 keys or 5 keys, computer key available.

L	25	31	25	27.5	30	32.5	35	37.5	40	42.5	45
R	6	6	25	27.5	30	32.5	35	37.5	40	42.5	45
M	10	10	10	10	10	10	10	10	10	10	10



Profile Cylinder 锁芯



40x40SNKK
5pcs computer keys



30x30SNKK
3pcs normal keys



35x35SNBK
Privacy cylinder



30x30BSKT



T01BS



T01SN



T01CP



T01AB



T02BS



T03BS



T04BS



T05SN

Tubular Lock 三柱式球锁



Total solutions to the building industry



MODEL: 592 PBET



MODEL: 592 PBBK



MODEL: 592 PBPS



MODEL: 575 ABET



MODEL: 576 PBPS

三柱式球形锁 TUBULAR LOCKSET

• 简述 Introduction •

- * 三柱式球形门锁适于家居住宅使用，易于安装而且经济实惠。
- * 开合寿命保障200,000次。
- * 与固定式门锁作通匙组合可加强保安功能。
- * 可选为简单的家庭装总锁组合。
- * 采用全钢锁体和锁舌套，表面镀锌起抗腐蚀作用。
- * 外饰件均采用不锈钢或铜质材料，执手采用双层加固型结构。
- * 可订做较美观的整体球。

- * Tubular lockset is an economical and easy to install product particularly adaptable for residential use.
- * Guaranteed for over 200,000 life cycles.
- * Can be keyed alike with deadbolt locks to improve security.
- * Can be master keyed in a simple combination for family and facility use.
- * Solid steel chassis and latch case, zinc plated for corrosion resistance.
- * Exposed trim is made of either wrought stainless steel or brass.
- * 2-piece reinforced knob as standard, eshetic 1-piece knob available upon request.
- * 590H/607H is specially designed to suit the requirement of plastic steel door.

• 特点 Features •

* 锁舌体

门锁功能为保险舌设计。
配置60mm/70mm (2-3/8" / 2-3/4") 可调舌。
可订25mm (1") 做直径的圆头四用可调舌。
配置57mm (2-1/4") 圆形弯唇扣板。
亦可订做70mm (2-3/4") T形弯唇扣板。

* 适装门厚

适用于35mm (1-3/8") 到45mm (1-3/4") 的门厚。
590H、607H等适用门厚为50mm (2") 到70mm (2-3/4") 。

* 门向

左开门或右开门均适用。

* Latch Bolt

Dead locking for keyed functions.
Adjustable backset 2-3/8" or 2-3/4" (60mm/70mm) as standard.
Adjustable 1" round drive-in 4-way latch is available upon request.
2-1/4" (57mm) curved lip strike as standard.
2-3/4" (70mm) strike available upon request.


* Door Thickness

Adjustable 1-3/8" to 1-3/4" (35mm to 45mm) as standard.
50mm (2") up to 70mm (2-3/4") for 590H and 607H.

* Handing

Fully reversible for left or right hand doors.

型号\尺寸	A	B	C	D
575	66.3	47.6	35-45	60(70)
592	66.3	47	35-45	60(70)
607	66.3	54	35-45	60(70)
	66.3	54	35-45	60(70)
	66.3	54	35-45	60(70)

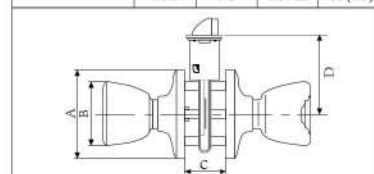

Tubular Lock 三柱式球锁



MODEL: 609 PBET



MODEL: 607 PBBK




MODEL: 607 PBPS



MODEL: 607 WLET



MODEL: 607 SSET

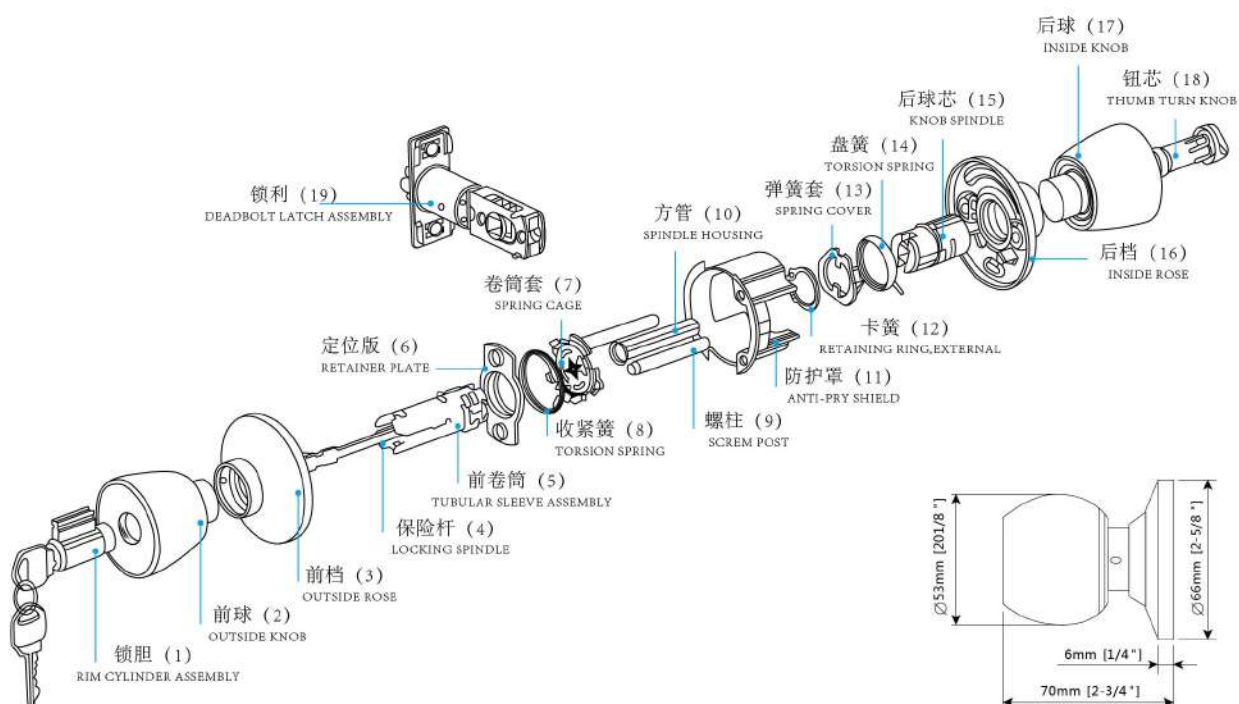

Light duty cylindrical lock 小档盖圆筒式门锁



MODEL: 587 PBET



MODEL: 587 PBBK



MODEL: 587 PBPS




MODEL: 607 PBPS



MODEL: 587 SSET



MODEL: 571 SSET

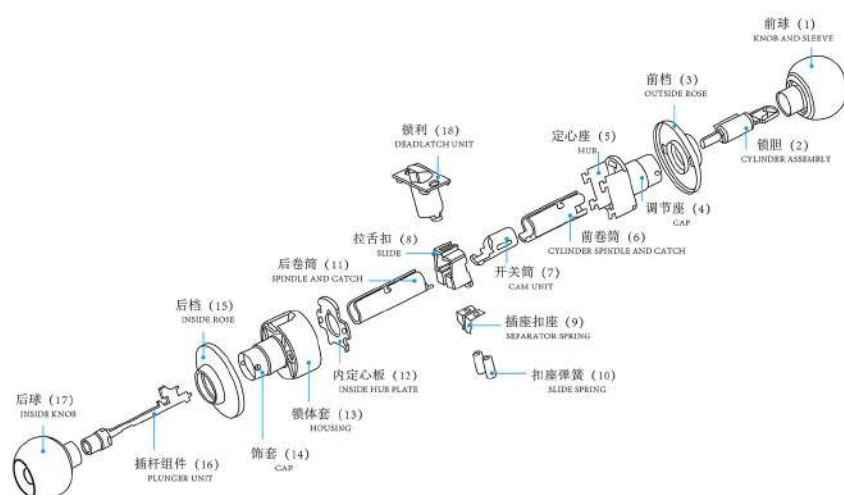

圆筒式门锁 CYLINDRICAL LOCKSETS


• 简述 Introduction •


- * 圆筒式门锁是适宜家居选择的经济而理想的产品。
- * 开合寿命保障200,000次。
- * 与固定式锁作通匙搭配可加强防盗性能。
- * 作通匙组合则使用更为方便。
- * 可选为家庭装总统锁组合。
- * 采用全钢锁体和锁舌套，表面镀锌抗腐蚀。
- * 外饰件均采用不锈钢或铜材料，锁舌面板用钢质材料。
- * 采用5孔弹子铜制锁头，配两把镀镍铜匙。

- * Cylindrical lockset is an ideal economical choice for standard residential use.
- * Guaranteed for over 200,000 life cycles.
- * Can be keyed alike to deadbolt series to maximize security.
- * Can be keyed alike in a group to enhance convenience.
- * Can be master keyed in a simple combination for corrosion resistance.
- * Can be master keyed in a simple combination for family and facility use.
- * Solid steel chassis and latch case, zinc plated for corrosion resistance.
- * Exposed trim is made of either wrought stainless steel or brass. 5-pin tumbler cylinder, brass plug with 2 nickel-plated brass keys.


• 特点 Features •

- * **锁舌体**
锁舌伸出长度12mm (1/2")。
门锁功能具有保险舌设计。
配置标准的70mm (2-3/4") 的T形弯唇扣板，亦可订做57mm (2-1/4") 圆形扣板。
- * **安装门厚**
适用于35mm (1-3/8") 到50mm (2")。
- * **中心距**
标准中心距为60mm (2-3/8")。
可订做70mm (2-3/4") 中心距或可调 (60mm或70mm, 2-3/8" or 2-3/4") 中心距。
注：中心距为门孔中心至门边的距离。
- * **门向**
左开门和右开门均适用。
- * **Latch Bolt**
1/2" (12mm) latch extension.
Dead locking for keyed functions.
2-3/4" (70mm) curved lip strike as standard. 2-1/4" (57mm) strike available upon request.
- * **Door Thickness**
Adjustable 2-3/8" to 2" (35mm to 50mm).
- * **Backset**
Standard 2-3/8" (60mm).
2-3/4" (70mm) and adjustable latch (2-3/8" or 2-3/4") also available upon request.
Note: Backset is the distance between door hole center and door edge.
- * **Handing**
Fully reversible for either right or left hand door.

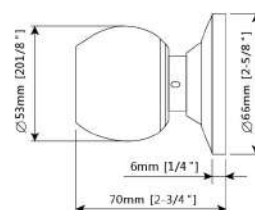



固定式门锁



• 简述 Introduction •

* Deadbolt series is an economical, durable auxiliary lock which provides the security of a 1" (25mm) throw zinc die case deadbolt with a hardened steel roller insert.

• 特点 Features •

内部构件采用镀锌钢质材料、
外饰件均采用不锈钢或铜质材料。
锁头外套圈可自由转动,能起防撬作用。

防锯锁舌,伸出度25mm,采用锌合金压铸材料,内置高强度防锯锁芯。

5孔弹子锁芯，方便取替换匙。
铜质锁芯，配两把镀镍铜匙。

左开式右开式门均适用。

适用于35mm (1-3/8") 到45mm (1-3/4")。

可调为60mm或70mm。

Internal components are zinc plated steel.
Exposed trim is either stainless steel or brass or steel.
Free turning cylinder trim prevents wrenching.

Full one inch throw zinc die cast deadbolt with hardened steel roller insert to resist sawing.

5 pin tumbler mechanism easily removable for rekeying.
Solid brass cylinder plug, supplied with 2 nickel plated
brass keys.

Fully reversible for right or left hand doors.

Adjustable 1-3/8" to 1-3/4" (35mm or 45mm).

Adjustable 2-3/8" or 2-3/4" (60mm or 70mm) .

功能说明：

单锁头呆锁内带旋钮，用锁匙或旋钮开闭。

双锁头呆锁，内外均用锁匙开闭。

该闭锁只能从室内的执手开关锁舌, 可作为辅助锁使用。由于在门外看不到其机制, 如和门窥配合使用则会比一般的防盗优越。

Single Cylinder Deadbolt with inside thumb-turn, Deadbolt projected or retracted by use of key outside or inside thumb-turn.

Double Cylinder Deadbolt, deadbolt projected or retracted by key on either side.

Deadbolt operated by thumb-turn inside only. This additional security mechanism can not be seen from outside, therefore when used with a door viewer, is far superior than the normal chain door guard.

Wafer lock 建筑锁



建筑用锁 WAFER LOCKSETS

• 简述 Introduction •

- * 588系列建筑用锁适用于住宅首次装锁，是经济而理想的选择。
- * 保障150,000次开合。
- * 采用全钢锁体和锁舌套，表面镀锌抗腐蚀。
- * 外饰件均采用不锈钢或铜质材料。
- * 588 Series wafer lockset is an ideal and economical choice for first installation in residential use.
- * Guaranteed for 150,000 life cycles.
- * Solid steel chassis and latch case are zinc plated for corrosion resistance.
- * Exposed trim is made of wrought stainless steel or brass.

• 特点 Features •

- * **锁芯和锁匙**
588系列为叶片式锁头，配两把镀镍钥匙。
- * **锁舌**
门锁功能具有保险舌设计。
标准中心距为60mm (2-3/8")，亦可订做70mm (2-3/4") 中心距。
(注：中心距为门孔中心至门边的距离。)
以57mm (2-1/4") 弯唇圆形扣板为标准配置。
亦可配置70mm (2-3/4") 的T形扣板。
- * **适装门厚**
适装于35mm到45mm (1-3/8" to 1-3/4") 的门厚。
- * **门向**
左开门或右开门均适用。
- * **Cylinder and keys**
Disc tumbler cylinder with 2 nickel plated steel keys.
- * **Latch Bolt**
Dead locking for keyed functions.
2-3/8" (60mm) backset as standard, 2-3/4" (70mm) available upon request
(backset is the distance between door hole center and door edge.)
2-1/4" (57mm) curved lip strike as standard.
2-3/4" (70mm) strike available upon request.
- * **Door Thickness**
Adjustable 1-3/8" to 1-3/4" (35mm to 45mm).
- * **Handing**
Fully reversible for either right or left hand doors.



MODEL:588 SNET



MODEL:567 SSET



MODEL:5871 SSET




MODEL:566 ABET



MODEL:568 PBET

叶片锁 单位: (mm)

型号\尺寸	A	B	C	D
588	65	51	35-45	60(70)
568	65	52.6	35-45	60(70)
	65	51	35-45	60(70)
	65	51	35-45	60(70)
	65	51	35-45	60(70)






Total solutions to the building industry


Commercial lock 功能锁




MODEL:5870 SSCC




MODEL:5807 SSCR




MODEL:5807 SSR




MODEL:587 SSPT



MODEL:5807 SSEL



MODEL:5807 SSCL



* 双向连通锁

适用于连通性出入口或商店入口处使用。
适用于多个出口的房间或办公室。
内执手上锁或释放均须用锁匙内执手开启。
外执手常处于闭锁状态。具有保险舌设计。

* ENTRANCE AND COMMUNICATION LOCK

Latch bolt operated by key outside or knob inside.
Outside knob always rigid.
Inside knob locked or unlocked by key in inside knob.
Latch bolt is automatically deadlocked when door is closed.

* 教室锁

适用于教室或储物室。
具有保险舌设计。
如外执手未用钥匙上锁，则内外执手均能开启锁舌。
内执手常处于开启状态。
用钥匙可释放外执手。

* CLASSROOM LOCK

Latch bolt operated by outside knob and inside knob, inside knob always free.
Outside knob locked or unlocked by key in inside knob.
Latch bolt is automatically deadlocked when door is closed.

* 储物室锁

适用于储物室，出口处使用。
具有保险舌设计。
用内执手或钥匙在外执手开启锁舌。
外执手常为闭锁状态。
内执手常为开启状态。

* STOREROOM

Latch bolt operated by knob from inside and by key from outside.
Outside knob always rigid.
Latch bolt is automatically deadlocked when door is closed.

* 阳台锁

适用于可限制进入的出口处。
具有保险舌设计。
锁舌由内外执手控制，外执手可由内执手的按钮锁死。
转动内执手或门关上后按钮自动释放。
内执手常处于开启状态。

* PATIO

Latch bolt operated by knobs from either side except when outside knob is locked by push button inside knob.
Turning inside knob or closing door automatically releases locking button.

* 单边锁

适用于单向控制的连通口或出口处。
也适用于门外没有足够空间安装执手的情况。
具有保险舌设计。
密封外盖圈设计。
应使用于不止一个出口的房。

* EXIT LATCH

For twin communicating or exit doors where one-side operation is required.
Also when space is limited between door and switch panel.
Deadlocking latch bolt.
Blank rose.
Should be used only where rooms have more than one entrance.

* 单向连通锁

适用于35mm到45mm的门厚。
具有保险舌设计。
钥匙可使锁开启或关闭。

* COMMUNICATION LOCK

For doors 1-3/8" to 1-3/4" (35-45mm) only.
Deadlocking latch bolt.
Latch bolt operated by key or rotating knob.
Fully turn of key locks or unlocks.

Leverset 执手锁



MODEL:808 SNET



MODEL:8803SSET



MODEL:8826SNET



MODEL:3431SNET



MODEL:805PBET



MODEL:809 PBET

执手锁 LEVERSET

• 简述 Introduction •


- * 三柱式执手锁适于家居住宅使用，易于安装而且经济实惠。
- * 开合寿命保障200,000次。
- * 与固定式门锁作通匙组合可加强保安功能。
- * 可选为简单的家庭装总锁组合。
- * 采用全钢锁体和锁舌套，表面镀锌起抗腐蚀作用。
- * 外饰采用锌合金压铸或铜质材料。
- * Tubular leverset is an economical and easy to install product particularly adaptable for residential use.
- * Guaranteed for over 200,000 life cycles.
- * Can be keyed alike with deadbolts to improve security.
- * Can be master keyed in a simple combination for family and facility use.
- * Solid steel chassis and latch case, zinc plated for corrosion resistance.
- * Exposed trim is made of zinc die-casting electro-plated or solid brass.

• 特点 Features •

- * **锁舌体**
门锁功能为保险舌设计。
配置60mm/70mm (2-3/8" / 2-3/4") 可调舌。
可定25mm (1") 做直径的圆体四用可调舌。
配置57mm (2-1/4") 圆形弯唇扣板。
亦可订做70mm (2-3/4") T形弯唇扣板。
- * **适配门厚**
适用于35mm (1-3/8") 到45mm (1-3/4") 的门厚。
- * **门向**
左开门或右开门均适用。
- * **Latch Bolt**
Dead locking for keyed functions.
Adjustable backset 2-3/8" or 2-3/4" (60mm/70mm) as standard.
Adjustable 1" round drive-in 4-way latch is available upon request.
2-1/4" (57mm) curved lip strike as standard.
2-3/4" (70mm) strike available upon request.
- * **Door Thickness**
Adjustable 1-3/8" to 1-3/4" (35mm to 45mm) as standard.
50mm (2") up to 70mm (2-3/4") for 808H and 8030H.
- * **Handing**
Fully reversible for left or right hand doors.
- * Tubular lock, Cylindrical lock available.
- * Function available: Entrance, Privacy, Passage, Dummy.

单位: (mm)

型号\尺寸	A	B	C	D
809 PB-BK	66.3	93.3	35-45	60(70)
808 PB-BK	66.3	93.3	35-45	60(70)
808 DC-BK	66.3	88	35-45	60(70)
3431 PB-PS	70	177.5	35-45	60(70)

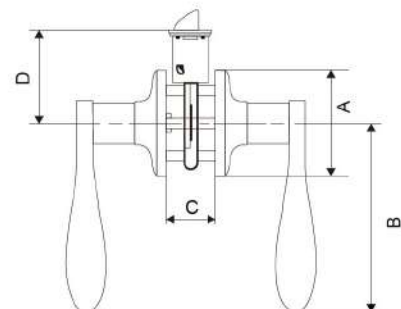

Leverset 执手锁



MODEL: 809 SBET



MODEL: 803 SBET



MODEL: 6491 SSET



MODEL: LH851



MODEL: LH855



MODEL: LH853 SNET



MODEL: LH854



MODEL: LH853 BNBK



MODEL: LH852SSET



MODEL: LH852 ABBK



MODEL: LH852 SSET



MODEL: LH852 BNPS

Brass Hinge & Steel Hinge




MODEL: SSH016
Stainless Steel Lift Off Hinge



MODEL: SSH013
Stainless Steel Ball Bearing Hinge



MODEL: SSH023
Single Action Spring Hinge

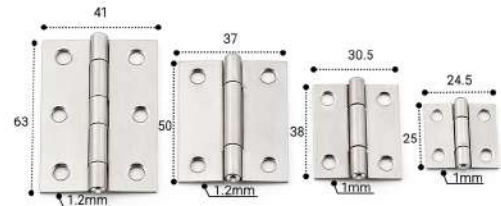

MODEL: SSH024
Stainless Steel Furniture Hinge



MODEL: 6*3*3MM
Anti Theft Anti Pry Removable Pin Hinge



MODEL: SSH022
Stainless Steel Crank Hinge



MODEL: BL027
Round Corner Hinge
Stainless Steel



MODEL: BL030
Stainless Steel Spring Hinge



MODEL: BL031
Stainless Steel Butterfly Door Spring Hinge



MODEL: AAH024
Aluminum Alloy Hinge



MODEL: SSH018
Butterfly Door Hinge



MODEL: BL021
Butterfly Door Hinge



MODEL: SSH017
Stainless Steel Flag Hinge



MODEL: IH01
Iron Flag Hinge

Finish	Finish
AB	SB
AC	SC
CP	SS
PB	available



MODEL: SSH031
Double Action Spring Hinge



Brass Piano Hinge

Width: 1" 1-1/4" 2" 3"

SIZE	SIZE
3" x 2-1/2"	4" x 3"
3" x 3"	4" x 4"
3-1/2" x 3-1/2"	4-1/2" x 3-1/2"
3-1/2" x 3"	4-1/2" x 4-1/2"
4" x 2-1/2"	5" x 3"
4" x 3-1/2"	5" x 4"

SIZE	SIZE
2.0" x 2.0" x 2.0mm	3.5" x 3.5" x 3.0mm
2.5" x 2.5" x 2.0mm	4.0" x 3.0" x 2.0mm
3.0" x 2.5" x 2.0mm	4.0" x 3.0" x 2.5mm
3.0" x 3.0" x 2.0mm	4.0" x 3.0" x 3.0mm
3.0" x 3.0" x 2.5mm	4.0" x 4.0" x 2.0mm
3.5" x 3.5" x 2.5mm	4.0" x 4.0" x 2.5mm

SIZE
4.0" x 4.0" x 3.0mm
5.0" x 3.0" x 2.5mm
5.0" x 3.0" x 3.0mm
100 x 50 x 2mm
102 x 72.5 x 2.5mm



MODEL: DV04
Brass door viewer
Size: $\Phi 12\text{mm}$, 14mm, 16mm
Door thickness: 35-55mm,
60-100mm
180° 200°
Finish: PB. AB. AC. CP. SN.
Synthetic Resin Lens
With Cover



MODEL: DV05
Zinc alloy viewer
Size: $\Phi 12\text{mm}$, 14mm, 16mm
Door thickness: 35-55mm,
60-100mm
180° 200°
Finish: PB. AB. AC. CP. SN.
Synthetic Resin Lens
With Cover



MODEL: DV06
Brass door viewer
Size: $\Phi 12\text{mm}$, 14mm, 16mm
Door thickness: 35-55mm,
60-100mm
180° 200°
Finish: PB. AB. AC. CP. SN.
Synthetic Resin Lens



MODEL: DV08
Brass door viewer
Size: $\Phi 12\text{mm}$, 14mm, 16mm
Door thickness: 35-55mm,
60-100mm
180° 200°
Finish: PB. AB. AC. CP. SN.
Synthetic Resin Lens



MODEL: DV12
Door Viewer
Material: ABS/plastic
Cover material: Synthetic resin lens with cover
Finish: BN
Diameter : 28mm
Door Thickness: 35-55mm
Viewing angle: 200 degree






Dust Proof 01
Brass Material
Finish: PB. AB. AC. CP. SN.
Size: 16mm



MODEL: DV10
Zinc alloy viewer
Size: $\Phi 12\text{mm}$, 14mm, 16mm
Door thickness: 35-55mm,
60-100mm
180° 200°
Finish: PB. AB. AC. CP. SN.
Synthetic Resin Lens



MODEL: DV11
Door Viewer
Material: Brass
Diameter size: 12mm, 14mm, 16mm
Door thickness : 35-55mm
Viewing angle: 180 degree/200 degree
Finish: PB. AB. AC. CP. SN

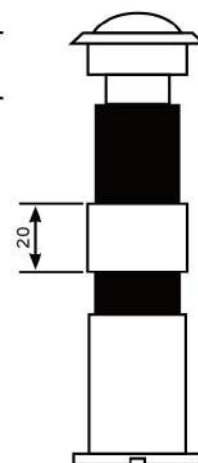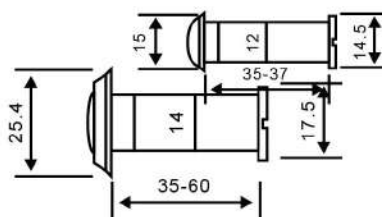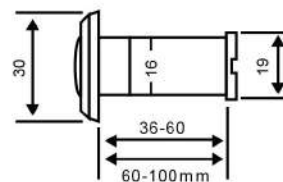



Total solutions to the building industry

Hardware Accessories 小五金



MODEL: NO01

Stainless steel house number.

Dimensions: 3", 4", 6", 8".

Finish: PB.AB.AC.CP.SN.



MODEL: NO03

Stainless steel house number.

Dimensions: 3", 4", 6", 8".

Finish: PB.AB.AC.CP.SN.



MODEL: NO05

Stainless steel house number.

Dimensions: 3", 4", 6", 8".

Finish: PB.AB.AC.CP.SN.



MODEL: NO07

Stainless steel house number.

Dimensions: 3", 4", 6", 8".

Finish: PB.AB.AC.CP.SN.



MODEL: NO08

Stainless steel house number.

Dimensions: 3", 4", 6", 8".

Finish: PB.AB.AC.CP.SN.



MODEL: HD03/HD02

Stainless steel furniture handle.

Diameter: 10, 12, 14.

Length: 64, 96, 128, 192, 284.



MODEL: FB001 SS

Width: 22mm.

Length: 4", 6", 8", 10", 12".

Finish: BP.AB.AC.NP.NB.CB.CP SN.BC.



MODEL: FB013 SS

Width: 22mm.

Length: 6", 8", 10", 12".

Finish: BP.AB.AC.NP.NB.CB.CP SN.BC.



MODEL: DSL 02

Stainless steel.

Door Selector.



Tubular lock latch



Deadbolt latch



Deadbolt latch



Cylindrical lock latch
60mm. 70mm. 90mm



90mm Entrance latch



Magnetic latch
60mm & 70mm



Tubular lock latch
60mm & 70mm



Round latch for lever handle



Dead latch
Round latch



MODEL: DS022

Zinc alloy door stopper
finish: PB. AB. AC. CP. SN.



MODEL: DS01

Stainless steel
door stopper



MODEL: 500

SUS304 material.
suit for toilet door or other doors.
easy to install.
Finish available: ABAC, PB, SN, CP..



MODEL: 600

Stainless steel Material,
suitable for furniture
doors as the concealed
handles



MODEL: DS02

Stainless steel
door stopper



Total solutions to the building industry

Glass Door Patch Fittings 玻璃夹







MODEL: F101

• FLOOR SPRING

1. Passes over 500,000 open-close test cycles.
2. Maximum door weight: 90kg.
3. For max.width : 1200mm
4. Stainless Steel Cover
5. Adjusting Screws : Latch speed adjust screw
Closing speed adjust screw

• To adjust door leaf and closing speed

1. By screw 2-4 to adjust the center of floor spring spindle in the same vertical line for center of top hinge spindle.
2. By screw 1 to adjust door leaf in right axis after closing.
3. By screw 3 to adjust bottom of door leaf in horizontal line to ground and to floor spring.
4. When adjusting closing speed and latching speed : By first and second adjusting screw
-clockwise : for slow speed and force.
-counterclockwise : for fast speed and force.

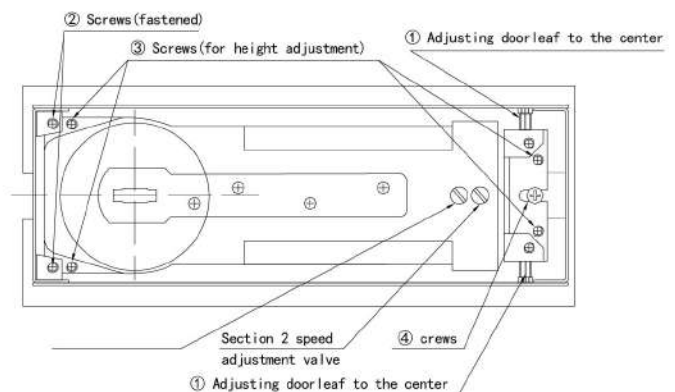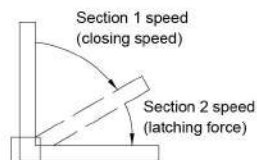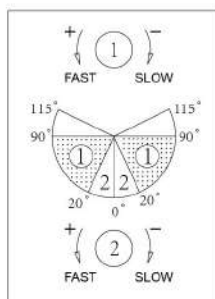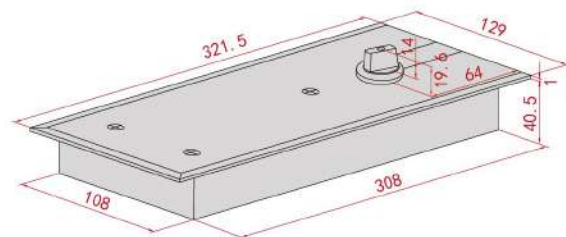

GLASS LOCK
MODEL: G122



GLASS LOCK
MODEL: G521




GLASS LOCK
MODEL: G421

Glass Door Patch Fittings 玻璃夹




MODEL: F110

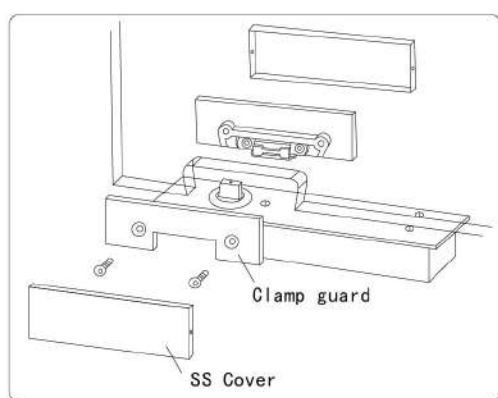


• BELOW HINGE


1. Inner Structure : Iron
2. Outer Case : Stainless Steel
3. With Protective Film
4. Screws & Hex Key Wrench in a bag

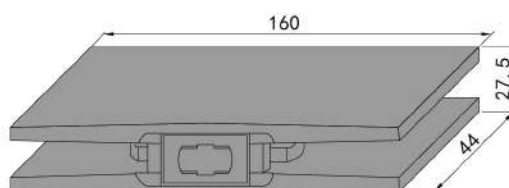

Recommended Glass Hole


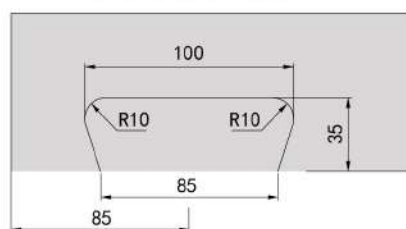


MODEL: F111

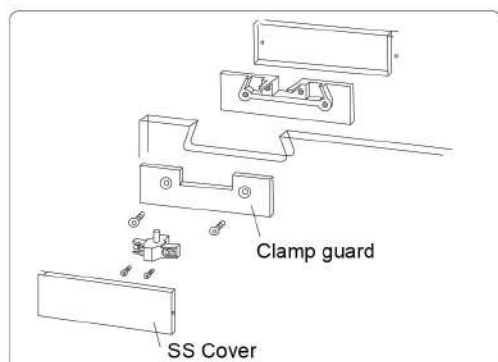

• TOP HINGE


1. Inner Structure : Iron
2. Outer Case : Stainless Steel
3. With Protective Film
4. Screws & Hex Key Wrench in a bag

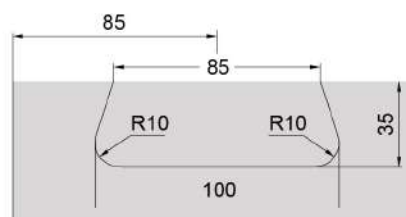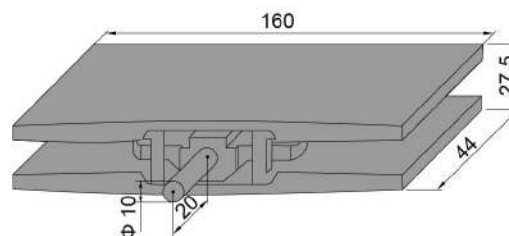

Glass Door Patch Fittings 玻璃夹





MODEL: F123

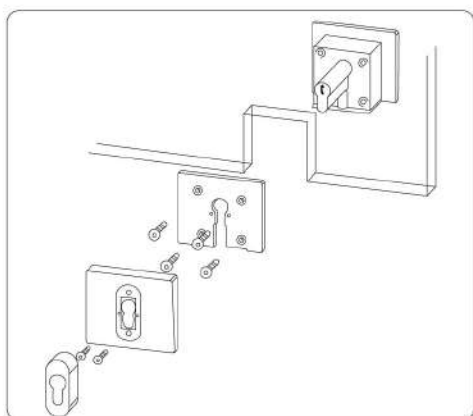

• CORNER LOCK


1. Inner Structure : Steel
2. Outer Case : Stainless Steel
3. With Protective Film
4. Screws & Hex Key Wrench in a bag

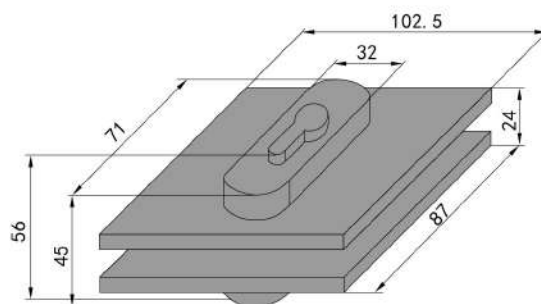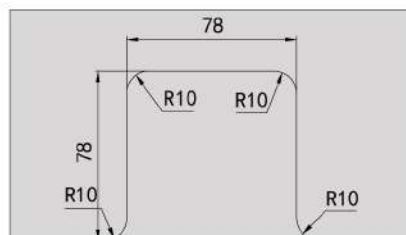

MODEL: F113

• SMALL SINGLE HINGE


1. Inner Structure : Iron
2. Outer Case : Stainless Steel
3. With Protective Film
4. Screws & Hex Key Wrench in a bag

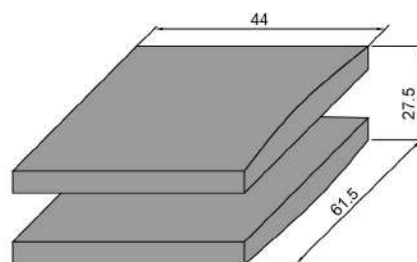

Glass Door Patch Fittings 玻璃夹





MODEL: F112

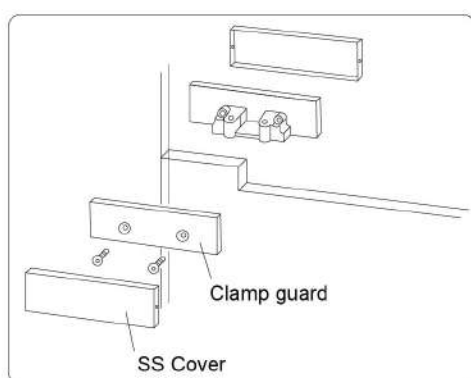


• UPPER HINGE

1. Inner Structure : Iron
2. Outer Case : Stainless Steel
3. With Protective Film
4. Screws & Hex Key Wrench in a bag

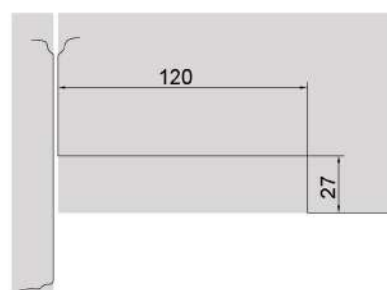
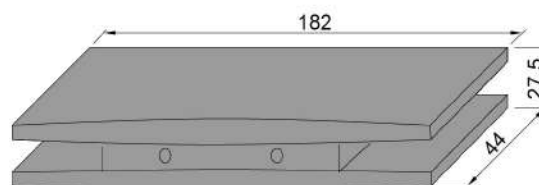


MODEL: F114

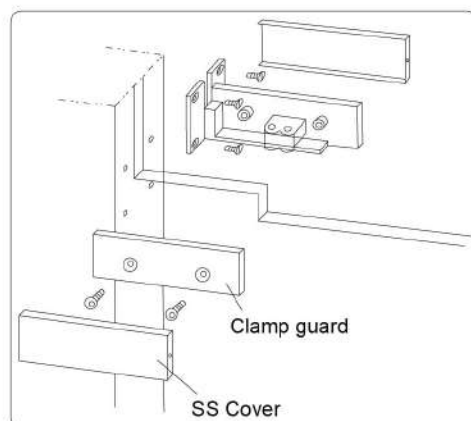

• SIDE HINGE

1. Inner Structure : Iron
2. Outer Case : Stainless Steel
3. With Protective Film
4. Screws & Hex Key Wrench in a bag

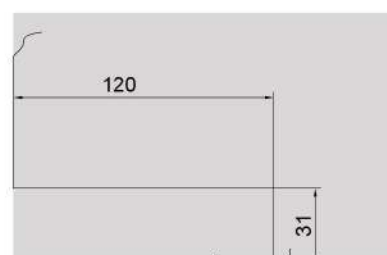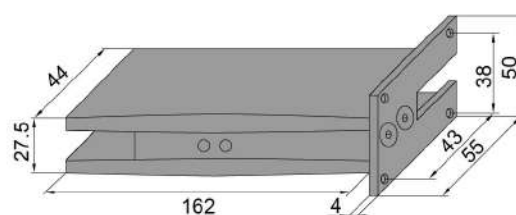





Door Hinge 地彈簧



• F100 DOOR HINGE

1. Product: High quality Door Hinge.
2. Material: Iron, Zinc die-cast case, steel base internal components with zinc plated finish.
3. Finish: SS/AB/SN/AC/PB are available.
4. Closing force: 25N.M.
5. Maximum bearing weight: 80kg.
6. Function: Includes opening and closing speed regulation, spring tension is fully adjustable, door can swing 116° inwards or out wards, with stops at 0, 88 and 116 in both directions.
7. Used: for kitchen, hallways and residential doors.


MODEL: F100

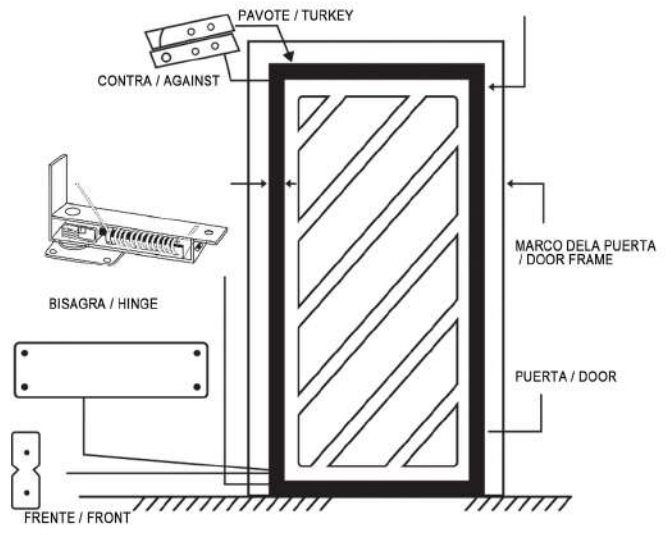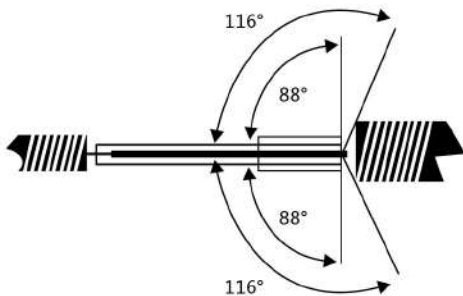

HANDLE

Material : Zinc alloy
Finish : Stain nickel

4-9/16"

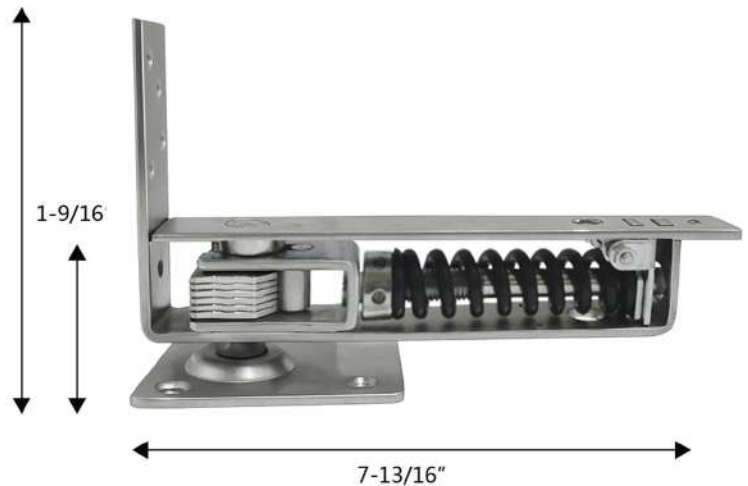



Total solutions to the building industry

Panic Exit Device 逃生锁

逃生锁 PANIC EXIT DEVICE

• 技术特点:

推杆锁

1. 通过钥匙开锁、闭锁。
2. 可适应门的厚度。
3. 多种颜色可选。
4. 可配合锁体使用。

Push bar

1. Lock and unlock by turn handle.
2. Different length according to the width of door.
3. Different colors can be chosen.
4. Combined with lock and counter lock.

• 技术特点:

推杆锁

1. 通过钥匙开锁、闭锁。
2. 可适应门的厚度。
3. 多种颜色可选。
4. 可配合锁体使用。

Push bar

1. Lock and unlock by turn handle.
2. Different length according to the width of door.
3. Different colors can be chosen.
4. Combined with lock and counter lock.

Lock case :072.

Handle: 015 or 9080E.

Cylinder: Cylinder length according to the door thickness.

• 技术特点:

1. 装置：双中心距72毫米和92毫米，无圆柱孔。
2. 紧急出口装置可安装在钢制、铝制或木制门上。
3. 可翻转，适用于单层或双层玻璃门和无玻璃门；仅适用于重量超过200千克、高2520毫米、宽1320毫米的铰链式或转轴式门叶。
4. 水平杆：L=900毫米。
5. 适用于单扇防火门。
6. 推杆与锁和反锁相结合的紧急出口装置。

1. Device: Double centre distance 72 mm and 92 mm .

2. Panic exit device can be fitted on doors, whether they are built in steel, aluminium or wood.

3. It is reversible and suitable for single or double glazed and unglazed doors; it is for use on hinged or pivoted door leaves only, with over 200 Kg in mass, 2520 mm in height and 1320 mm in width.

4. Horizontal Bar: L=900MM

5. It is suitable for single leaf doors a fire doors.

6. Panic exit device with push-bar combined with lock and counterlock.

• 技术特点:

1. EN1125 认证。
2. 一推即开 | 快速疏散逃生。
3. 适用于防火门与紧急出口门。
4. 单门/双门通用 | 左右开门可互换（不分方向）。
5. 重载轴承结构 | 最大门重 ≥200kg。
6. 中心距可选 72/92mm | 9mm 方轴。
7. 支持天地杆联动（双开门系统）。
8. 宽温工作范围：-10°C ~ +60°C。
9. 适用于商场、医院、学校、机场、地铁站等高人流公共建筑场所。

1. EN1125 Certified.

2. One Push to Open | Fast Evacuation.

3. For Fire & Emergency Exit Doors.

4. Fits Single & Double Doors | Reversible L/R.

5. Heavy-Duty Bearing | Max Door Weight ≥200kg.

6. Optional 72/92mm Center Distance | 9mm Spindle.

7. Supports Top & Bottom Bolt Linkage (Double Doors).

8. Wide Working Range: -10°C to +60°C.

9. Ideal for malls, hospitals, schools, airports, metro stations, and other high-traffic public buildings.



MODEL:305



MODEL:307



MODEL:311



MODEL:313




Panic Exit Device 逃生锁



MODEL:300




MODEL:310

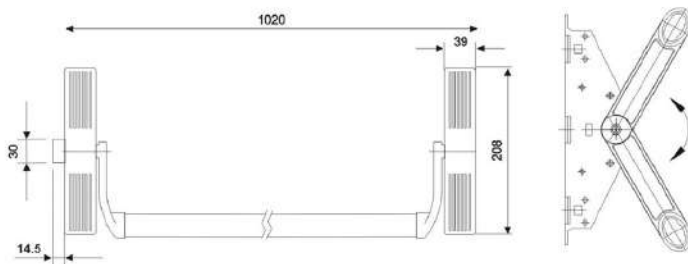

MODEL:330



MODEL:320

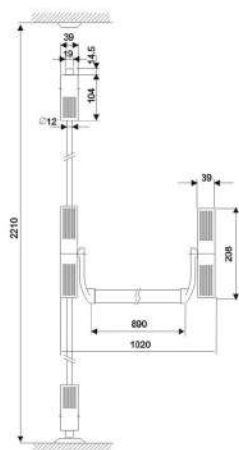

逃生锁 PANIC EXIT DEVICE

• 技术特点:

1. 配合锁体进行锁闭。
2. 明装型。
3. 下压式杆子。
4. 锁体长度可按照门扇宽度调整。
5. 多种颜色可选。

1. Closes with mortise.
2. Exposure Type.
3. Push-type rod.
4. Different length according to the width of door.
5. Different colors can be chosen.

• 技术特点:

1. 中国消防安全防火认证。
2. 美国国家标准二级认证。
3. 美国1.5小时防火认证。
4. 美国BHMA寿命测试，保证使用500000次。
5. 传统款式，天地杆型适合左开门或者右开门。

1. Traditional European design, non-handed.
2. A lateral lock point.
3. EN1125 certified from Europe.
4. EN1634 certified under 1.5 hours fire-rated for fire door.
5. CE marked for safety.
6. The square spindle by 8*8 or 9*9.

• 技术特点:

1. 中国消防安全防火认证。
2. 经典欧洲款式，适合左开门和右开门。
3. 插芯锁配套使用。
4. 欧盟EN1125性能测试，保证500000次。
5. 欧盟EN1634防火测试，3小时防火适用防火门。
6. 欧盟CE安全认证。

1. Traditional European design, non-handed.
2. 3 locking points.
3. EN1125 certified from Europe.
4. EN1634 certified under 3 hours fire-rated for fire door.
5. CE marked for safety.
6. The square spindle by 8*8 or 9*9.

• 技术特点:

1. 中国消防安全防火认证。
2. 经典欧洲款式，适合左开门和右开门。
3. 插芯锁配套使用。
4. 欧盟EN1125性能测试，保证500000次。
5. 欧盟EN1634防火测试，3小时防火适用防火门。
6. 欧盟CE安全认证。

1. Traditional European design, non-handed.
2. 2 locking points.
3. EN1125 certified from Europe.
4. EN1634 certified under 3 hours fire-rated for fire door.
5. CE marked for safety.
6. The square spindle by 8*8 or 9*9.

逃生锁 PANIC EXIT DEVICE

• 技术特点:

1. 单点锁闭。
2. 明装型。
3. 平推式半长推杆。
4. 锁体长度可按照门扇宽度调整。
5. 多种颜色可选。
6. 铁质粉末涂层。

1. Close by one point.
2. Exposure Type.
3. Semi length push bar.
4. Different length according to the width of door.
5. Different colors can be chosen.
6. Iron with powder coating.

• 技术特点:

1. 单点锁闭。
2. 明装型。
3. 平推式半长推杆。
4. 锁体长度可按照门扇宽度调整。
5. 多种颜色可选。
6. 不锈钢材质。

1. Close by one point.
2. Exposure Type.
3. Semi length push bar.
4. Different length according to the width of door.
5. Different colors can be chosen.
6. Stainless steel material.

• 技术特点:

1. 天地两点锁闭。
2. 明装型。
3. 平推式半长推杆。
4. 锁体长度可按照门扇宽度调整。
5. 天地插销可根据门扇高度调整。
6. 多种颜色可选。
7. 铁材质。

1. Close by two points.
2. Exposure Type.
3. Semi length push bar.
4. Different length according to the width of door.
5. Different height of bolts according to the height of door.
6. Different colors can be chosen.
7. Iron material.

• 技术特点:

1. 天地两点锁闭。
2. 明装型。
3. 平推式半长推杆。
4. 锁体长度可按照门扇宽度调整。
5. 天地插销可根据门扇高度调整。
6. 多种颜色可选。
7. 不锈钢材质。

1. Close by two points.
2. Exposure Type.
3. Semi length push bar.
4. Different length according to the width of door.
5. Different height of bolts according to the height of door.
6. Different colors can be chosen.
7. Stainless steel material.



MODEL:301



MODEL:301-S



MODEL:302



MODEL:302-S

Panic Exit Device 逃生锁



Total solutions to the building industry

逃生锁 PANIC EXIT DEVICE

• 技术特点:

推杆锁

1. 产品名称: 应急出口装置。
2. 质量标准: CE证书, 防火EN1125.
3. 标准长度1050mm.
4. 铝质材料, 粉末喷漆, 钢制推杆、可提供不同的表面处理, 可用于左手和右手门。
5. 模块化设计允许对设备进行升级, 不断变化的技术, 满足设施不断变化的需求。
6. 专为学校、医院和政府设施等机构应用, 为高使用率和高滥用率而设计, 提供各种可现场配置的选项和改装套件。A variety of field-configurable options and retrofit kits available.

1. Product Name : Panic exit device.
2. Quality standard: CE certificate, Fire rated EN1125.
3. Length 1050mm as standard.
4. Aluminum material with powder painting, steel push bar, different finishes are available, left and right hands also available.
5. Modular design allows ability to upgrade device to keep up with changing technology and meet a facility's changing needs.
6. Designed for high use and use in institutional applications like schools, hospitals and government facilities.

MODEL: 308D

• 技术特点:

推杆锁

1. 产品名称: 应急出口装置。
2. 质量标准: CE证书, 防火EN1125.
3. 标准长度1050mm.
4. 铝质材料, 粉末喷漆, 钢制推杆、可提供不同的表面处理, 可用于左手和右手门。
5. 模块化设计允许对设备进行升级, 不断变化的技术, 满足设施不断变化的需求。
6. 专为学校、医院和政府设施等机构应用, 为高使用率和高滥用率而设计, 提供各种可现场配置的选项和改装套件。A variety of field-configurable options and retrofit kits available.

1. Product Name : Panic exit device.
2. Quality standard: CE certificate, Fire rated EN1125.
3. Length 1100mm as standard.
4. Aluminum material with powder painting, steel push bar, different finishes are available, left and right hands also available.
5. Modular design allows ability to upgrade device to keep up with changing technology and meet a facility's changing needs.
6. Designed for high use and use in institutional applications like schools, hospitals and government facilities.

MODEL: 308S

• 技术特点:

推杆锁

1. 产品名称: 应急出口装置。
2. 质量标准: CE证书, 防火EN1125.
3. 标准长度1100mm.
4. 铝合金+铁材料, 粉末喷漆, 铝合金推杆、可提供不同的表面处理, 可用于左手和右手门。
5. 模块化设计允许对设备进行升级, 不断变化的技术, 满足设施不断变化的需求。
6. 专为学校、医院和政府设施等机构应用, 为高使用率和高滥用率而设计, 提供各种可现场配置的选项和改装套件。A variety of field-configurable options and retrofit kits available.

1. Product Name : Panic exit device.
2. Quality standard: CE certificate, Fire rated EN1125.
3. Length 1100mm as standard.
4. Aluminium alloy + Iron material with powder painting, aluminium alloy push bar, different finishes are available, left and right hands also available.
5. Modular design allows ability to upgrade device to keep up with changing technology and meet a facility's changing needs.
6. Designed for high use and use in institutional applications like schools, hospitals and government facilities.

MODEL: 309D

• 技术特点:

推杆锁

1. 产品名称: 应急出口装置。
2. 质量标准: CE证书, 防火EN1125.
3. 标准长度750mm.
4. 铝合金+铁材料, 粉末喷漆, 铁制双开推杆、可提供不同的表面处理, 可用于左手和右手门。
5. 模块化设计允许对设备进行升级, 不断变化的技术, 满足设施不断变化的需求。
6. 专为学校、医院和政府设施等机构应用, 为高使用率和高滥用率而设计, 提供各种可现场配置的选项和改装套件。A variety of field-configurable options and retrofit kits available.

1. Product Name : Panic exit device.
2. Quality standard: CE certificate, Fire rated EN1125.
3. Length 750mm as standard.
4. Aluminium alloy + Iron material with powder painting, Iron Push Bar for double doors, different finishes are available, left and right hands also available.
5. Modular design allows ability to upgrade device to keep up with changing technology and meet a facility's changing needs.
6. Designed for high use and use in institutional applications like schools, hospitals and government facilities.

MODEL: 309S



Panic Exit Device 逃生锁

逃生锁 PANIC EXIT DEVICE

• 技术特点:

推杆锁

- 1.通过钥匙开锁、闭锁。
- 2.可适应门的厚度。
- 3.多种颜色可选。
- 4.可配合锁体使用。

Push bar

- 1.Lock and unlock by turn handle.
- 2.Different length according to the width of door.
- 3.Different colors can be chosen.
- 4.Combined with lock and counter lock.



MODEL:315



MODEL: SH01

Adjustable Spring Hinge for Fire Doors
Durable zinc-plated iron hinge
with adjustable tension.



MODEL: DSL02

Stainless Steel
Fire Door Coordinator

Panic Exit Device 逃生锁



逃生锁 PANIC EXIT DEVICE

• 技术特点:

防火门配件

1. 材质: 铁喷漆

2. 优质静电喷涂:

我们的配件经过优质静电喷漆处理, 不仅具有耐腐蚀性, 而且表面美观, 可与您的空间设计完美融合。

3. 用途广泛:

商业和工业环境: 使用我们专为商业和工业环境设计的防火门, 确保员工的安全, 保护您的财产。

住宅和公寓: 我们专为住宅和公寓设计的防火门优雅而高效。

可为您的家人提供安全保障, 让他们高枕无忧。

FIRE DOOR ACCESSORIES

1. Material: Iron Spraying

2. Quality Electrostatic Painting:

Our accessories are treated with high-quality electrostatic paint, offering not only resistance to corrosion, but also an aesthetically pleasing finish that blends in perfectly with the design of your space.

3. Customisation to meet your needs:

We understand that each environment is unique. That's why we offer customisation options to meet the specific needs of your project. From special finishes to exclusive designs, we ensure that our accessories integrate perfectly with your vision of security and style.

Versatile applications:

Commercial and Industrial Environments: Ensure the safety of your employees and protect your property with our fire doors designed for commercial and industrial environments.

Residences and Condominiums: Provide security and peace of mind for your family with our elegant and efficient fire doors, designed for homes and condominiums.

ACESSÓRIOS PARA PORTAS CORTA FOGO

Maçanetas Ergonômicas e Seguras:

Ofereça uma variedade de maçanetas projetadas para garantir uma operação fácil e segura das portas corta-fogo. Nossas opções incluem maçanetas antipânico, ideais para situações de evacuação, e maçanetas com designs ergonômicos para facilitar o uso diário.

Trincos e Batentes:

Complemente suas portas corta-fogo com trincos e batentes robustos, garantindo um fechamento seguro e eficaz. Nossos trincos são projetados para resistir às forças externas, proporcionando tranquilidade em termos de segurança.



MODEL:023 ETAN



MODEL:023 ET



MODEL:023 PS



MODEL: 035

Material : Aluminium.
Panic device security trim ,
with cylinder, spray painting.



MODEL: 033

Material : Carbon Steel .
Panic device security trim ,
with cylinder, spray painting.



MODEL: 030

Material : Aluminium alloy.
Works with cylinder lock and
unlock suits different push bar.

Panic Exit Device 逃生锁



Total solutions to the building industry



MODEL: 026

Outside lever handle for panic exit device.
Lock and unlock by key.
Spindle length can be customized
according to door thickness.
Various finishes available.



MODEL: 027

75mm rosette.
retracts latch bolt,unlocks lever.
Key operates lever,otherwise always locked.
Trim always,operable and free.
Dummy trim, one sided.




MODEL: 028

Key retracts latch bolt,unlocks lever.
Key operates lever,otherwise always locked.
Trim always,operable and free.
Dummy trim, one sided.
Keyed lock, storeroom, passage 3 funtions
are available .



MODEL: 9080E

Material: Stainless Steel 304/201.
Stainless Steel Handle with Plate,
combined with Mortise lock case and
brass cylinder as one set.

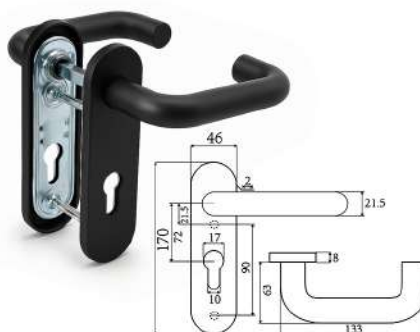

MODEL: 015

Material:ABS
3 brass keys and brass cylinder.
Combined with push bar and lock.



MODEL: 037

Key retracts latch bolt,unlocks knob .
Key operates knob ,otherwise always locked.
Trim always,operable and free.
Dummy trim, one sided.
Keyed lock, storeroom, passage 3 funtions
are available .




MODEL: 072

Material: Iron.
Suit for Mortise Type Lock Body.
Color: Painted optional.
Spindle hole: 9*9.



MODEL: 001

Material: 304 Stainless Steel
with Plate and suit for Panic
Exit Device.

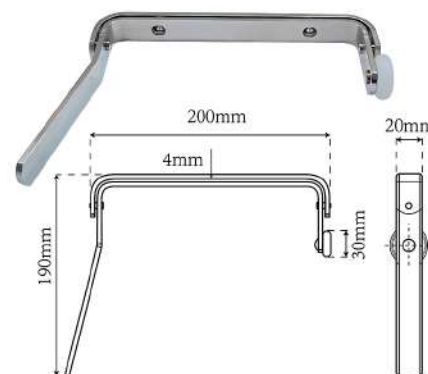

MODEL: 036

Material:Nickel Plated Iron
Used:Fire Door

Door Closer 闭门器



MODEL: JU-051



MODEL: JU-061



MODEL: JU-072





MODEL: JU-073



MODEL: JU-088



MODEL: JU-093

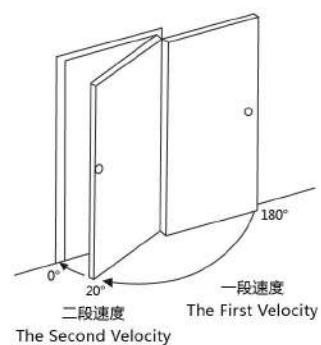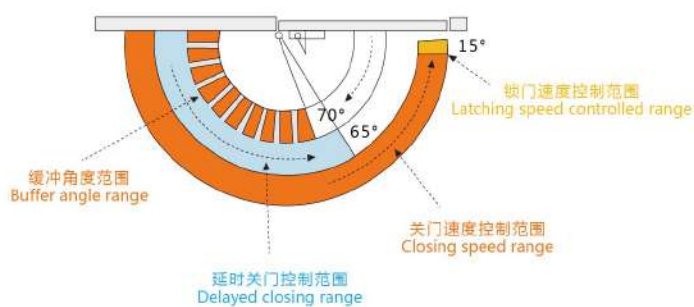

Model	Door Width	Capacity (KG)	Closing Force	Max opening angle
JU-051	800mm	15-30KG	8N.m	180°
JU-061	850mm	25-45KG	14N.m	180°
JU-072	1050mm	40-65KG	28N.m	180°
JU-073	850mm	40-65 KG	14N.m	180°
JU-074	1050mm	60-100KG	28N.m	180°
JU-088	950mm	40-65KG	16N.m	180°
JU-093	1050mm	45-85KG	19N.m	180°

Bathroom Accessories

浴室配件



Total solutions to the building industry

Bathroom grab handle

MODEL: BH01

Material: stainless steel.

Finish: SSS, PSS.


Length: 300mm, 400mm, 500mm,

600mm, 700mm, 800mm,

900mm, 1000mm.



Tube Dia	Height	Length	Rosette
25	75	300	54
32	90	300	78

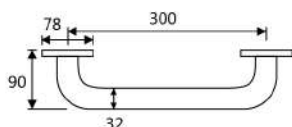

Anti-slip grab handle

MODEL: BH02

Material: stainless steel.

Finish: SSS, PSS.


Length: 300mm, 400mm, 500mm,

600mm, 700mm, 800mm,

900mm, 1000mm.



Tube Dia	Height	Length	Rosette
32	85	400	65

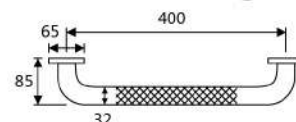


Bathroom grab handle

MODEL: BH03

Material: stainless steel.

Finish: SSS, PSS.

Tube Dia	Height	Length	Rosette
25	75	415	65




Anti-slip grab handle

MODEL: BH04

Material: stainless steel.

Finish: SSS, PSS.

Tube Dia	Height	Length	Rosette
25	80	415	65



Hook

MODEL: BH05

Material: stainless steel.


Finish: SSS, PSS.

Plate thickness: 2.5mm.

Size: 1-8 hooks.



Length	Width	Hook
200	30	3
350	30	5
430	30	6

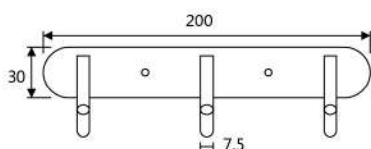

Hook

MODEL: BH06

Material: stainless steel.


Finish: SSS, PSS.

Plate thickness: 2.5mm.

Size: 1-8 hooks.



Length	Width	Hook
200	30	3
350	30	5
430	30	6

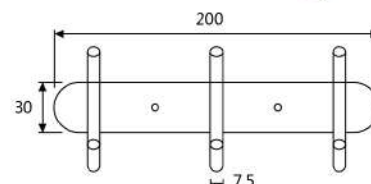

Hook

MODEL: BH07

Material: stainless steel.


Finish: SSS, PSS.

Plate thickness: 2.5mm.

Size: 1-8 hooks.



Length	Width	Hook
195	25	3
390	25	5
460	25	6

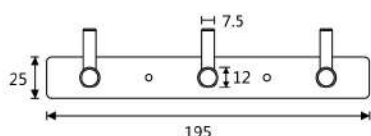

Hook

MODEL: BH08

Material: stainless steel.


Finish: SSS, PSS.

Plate thickness: 2.0mm.

Size: 4 hooks.



Length	Width	Hook
180	45	4

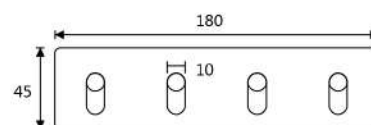



Bathroom Accessories 浴室配件

Hook

MODEL: BH09


Material: stainless steel.

Finish: SSS.PSS.

Plate thickness: 2.0mm.

Size: 4 hooks.

Length	Width	Hook
200	50	4

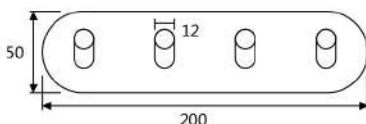



Hook

MODEL: BH10

Material: stainless steel.

Finish: SSS.PSS.

Plate thickness: 2.0mm.

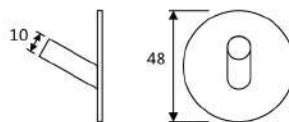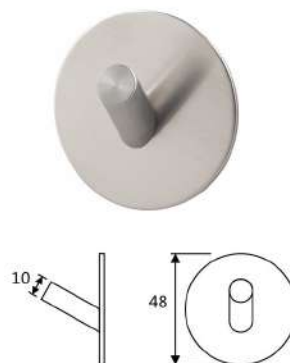


Hook

MODEL: BH11

Material: stainless steel.

Finish: SSS.PSS.

Plate thickness: 2.0mm.

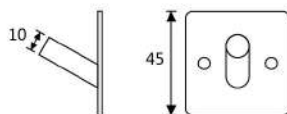


Hook

MODEL: BH12

Material: stainless steel.

Finish: SSS.PSS.

Plate thickness: 2.8mm.

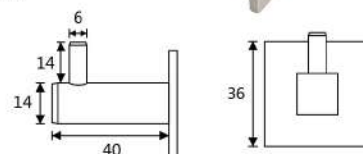


Hook

MODEL: BH13

Material: stainless steel.

Finish: SSS.PSS.

Plate thickness: 2.8mm.

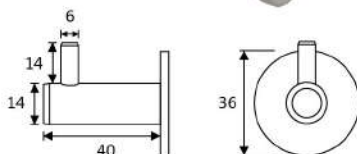


Hook

MODEL: BH14

Material: stainless steel.

Finish: SSS.PSS.

Plate thickness: 0.8mm.

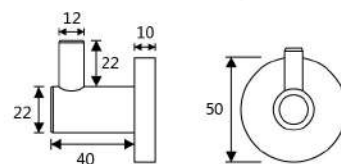

Door flush bolt


MODEL: BH15

Material: stainless steel.

Finish: SSS.PSS.

Plate thickness: 2.8mm.

Length: 80mm.100mm.

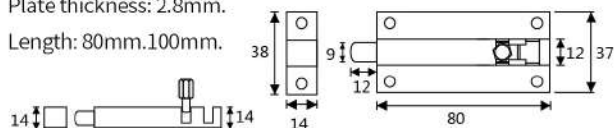


Door flush bolt

MODEL: BH16

Material: stainless steel.

Finish: SSS.PSS.

Plate thickness: 1.0mm.

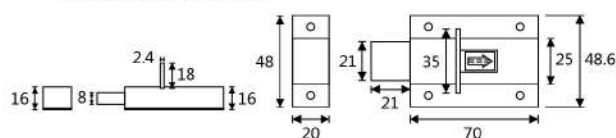

Bathroom Accessories 浴室配件



Total solutions to the building industry


Door flush bolt

MODEL: BH17

Material: stainless steel.

Finish: SSS, PSS.

Thickness: 2.5mm.

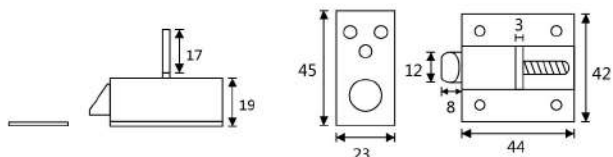


Towel ring

MODEL: BH18

Material: stainless steel.

Finish: SSS, PSS.

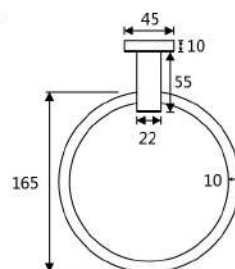


Paper holder

MODEL: BH19

Material: stainless steel.

Finish: SSS, PSS.

Thickness: 1.0mm.

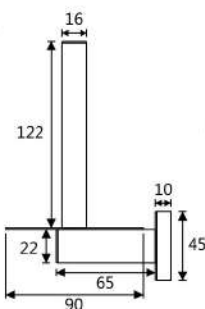



Toilet roller holder

MODEL: BH20

Material: stainless steel.

Finish: SSS, PSS.

Thickness: 1.0mm.




Toilet tissue holder

MODEL: BH21

Material: stainless steel.

Finish: SSS, PSS.

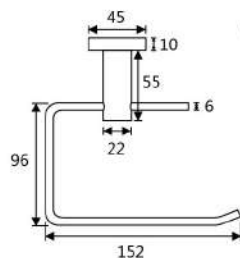


Toilet tissue holder

MODEL: BH22

Material: stainless steel.

Finish: SSS, PSS.

Thickness: 2.0mm.

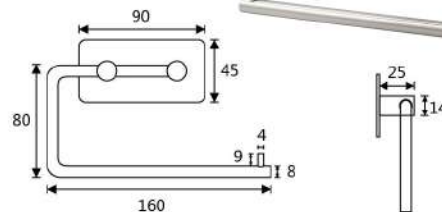


Toilet roller holder

MODEL: BH23

Material: stainless steel.

Finish: SSS, PSS.

Thickness: 1.5mm.

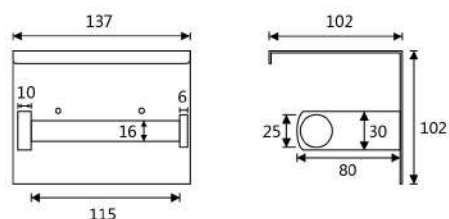



Total solutions to the building industry



Bathroom Accessories 浴室配件

Toilet roller holder

MODEL: BH24

Material: stainless steel.

Finish: SSS, PSS.

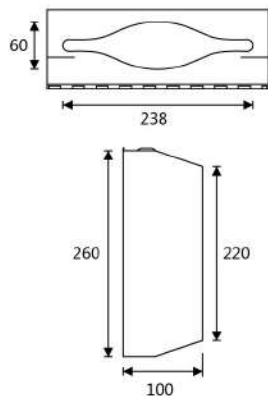



Toilet roller holder

MODEL: BH25

Material: stainless steel.

Finish: SSS, PSS.

Thickness: 0.8mm.





Soap holder with glass

MODEL: BH26

Material: stainless steel.

Finish: SSS, PSS.





Soap holder

MODEL: BH27

Material: stainless steel.

Finish: SSS, PSS.



Basket

MODEL: BH28

Material: stainless steel.



Finish: SSS, PSS.

Size: 300×135×60mm.

300×135×100mm.

400×135×60mm.

400×135×100mm.



Triangle basket



MODEL: BH29

Material: stainless steel.

Finish: SSS, PSS.

Size: 200×200mm.

250×250mm.



Bathroom Accessories 浴室配件




Total solutions to the building industry

Triangle basket Shelf

MODEL: BH30

Material: stainless steel.

Finish: SSS. PSS.

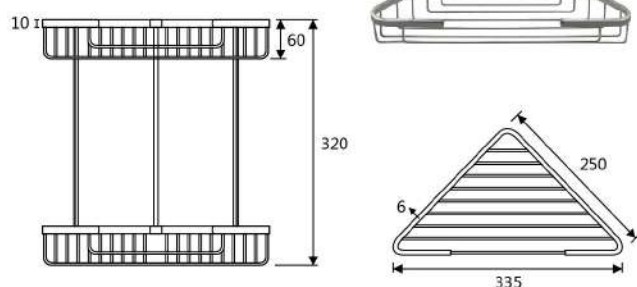


Triangle basket Shelf with hook

MODEL: BH31

Material: stainless steel.

Finish: SSS. PSS.

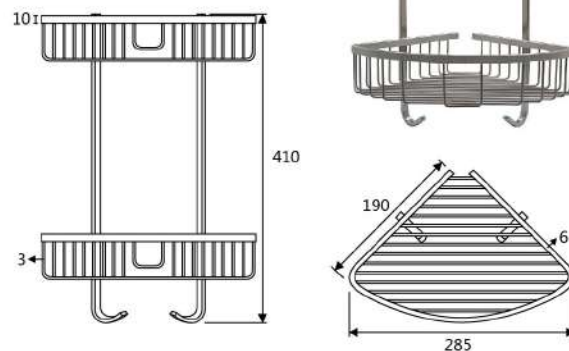


Tower shelf with hook

MODEL: BH32

Material: stainless steel.

Finish: SSS. PSS.

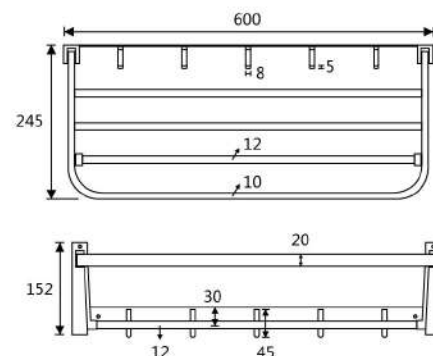


Double decker tower shelf

MODEL: BH33

Material: stainless steel.

Finish: SSS. PSS.

Length: 450mm. 600mm.

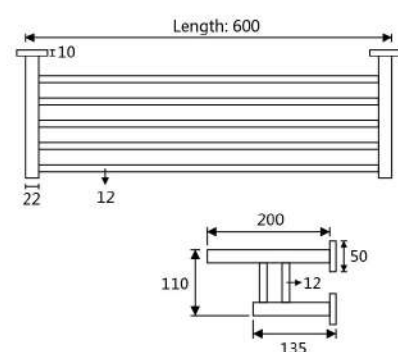


Single bar Tower bar

MODEL: BH34

Material: stainless steel.

Finish: SSS. PSS.

Length: 300. 400. 500. 600mm.





Handle gel bottle

MODEL: BH35

Material: stainless steel.

Finish: SSS, PSS.

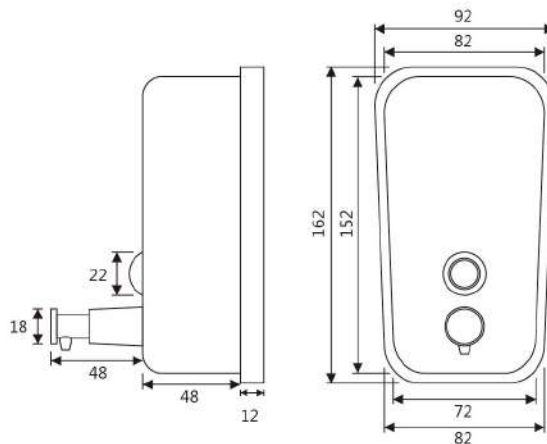


Hook

MODEL: BH36

Material: stainless steel.

Finish: SSS, PSS.

Thickness: 3.5mm.




Hook

MODEL: BH37

Material: stainless steel.

Finish: SSS, PSS.

Thickness: 3.5mm.

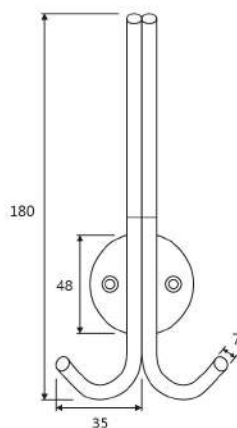


Hook

MODEL: BH41

Material: stainless steel.

Finish: SSS, PSS.




Hook

MODEL: BH42

Material: stainless steel.

Finish: SSS, PSS.

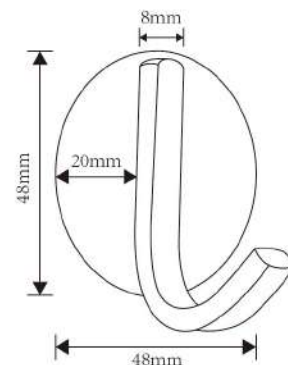

Bathroom Accessories 浴室配件




Total solutions to the building industry

Hook

MODEL: BH39

Material: stainless steel.

Finish: SSS, PSS.

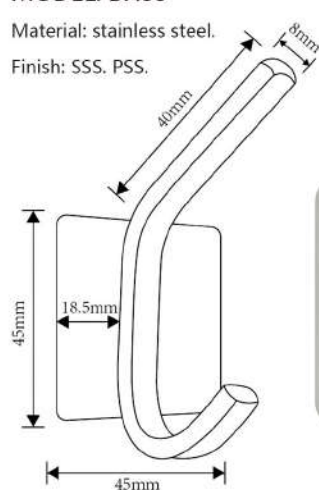


Hook

MODEL: BH40

Material: stainless steel.

Finish: SSS, PSS.

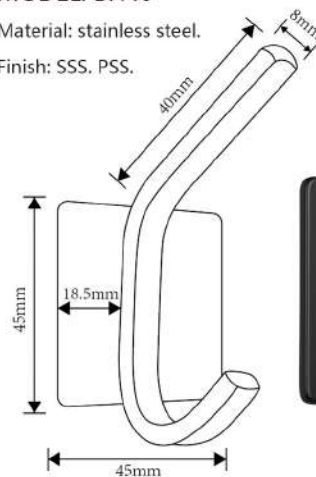


Hook

MODEL: BH38

Material: stainless steel.

Finish: SSS, PSS.

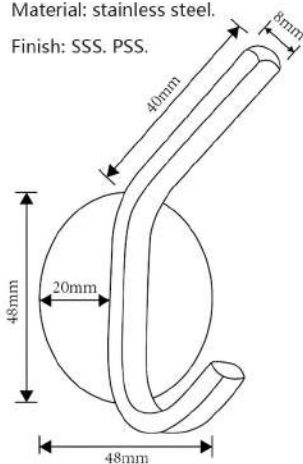


Toilet tissue holder

MODEL: BH43

Material: stainless steel.

Finish: SSS, PSS.

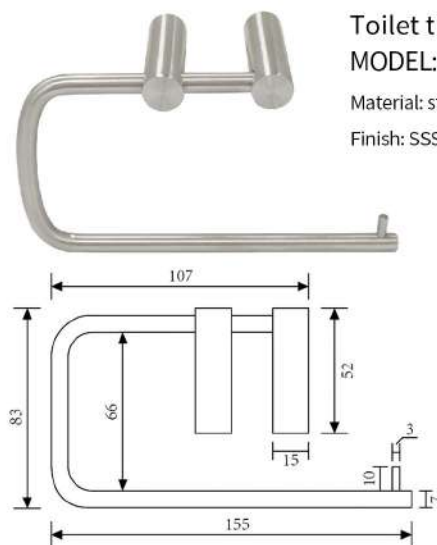



Total solutions to the building industry


Bathroom Accessories 浴室配件

Basket Shelf

MODEL: BH51

Material: stainless steel

Finish: SSS, PSS.





Basket Shelf

MODEL: BH53

Material: stainless steel

Finish: SSS, PSS.




Basket Shelf

MODEL: BH50

Material: stainless steel

Finish: SSS, PSS.


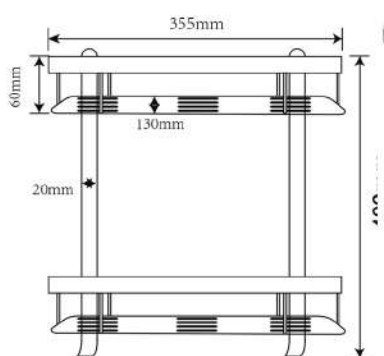


Basket Shelf

MODEL: BH52

Material: stainless steel

Finish: SSS, PSS.



Glass Door Handle

玻璃门拉手




Total solutions to the building industry

Glass Door Handle

MODEL:108


Material:stainless steel

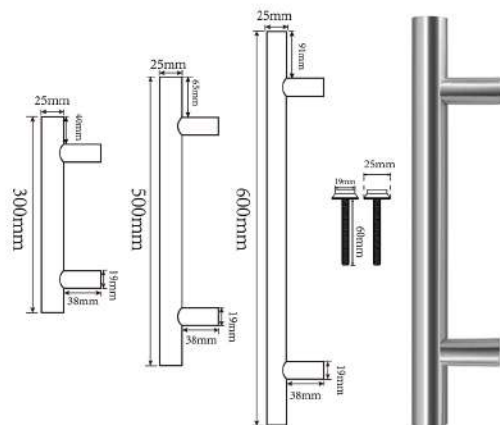

Glass Door Handle

MODEL:109


Material: stainless steel

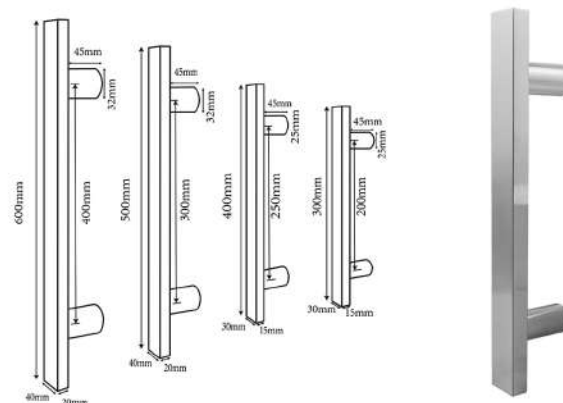

Glass Door Handle

MODEL:108


Material:stainless steel

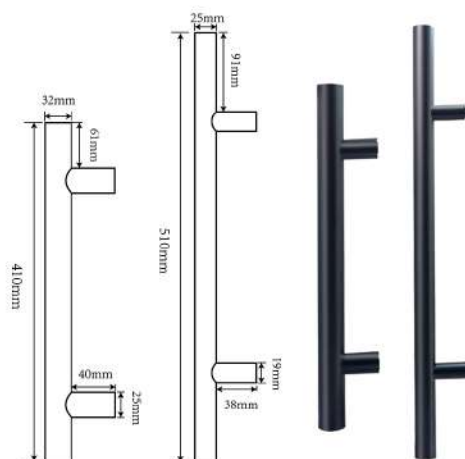

Glass Door Handle

MODEL:110


Material: stainless steel

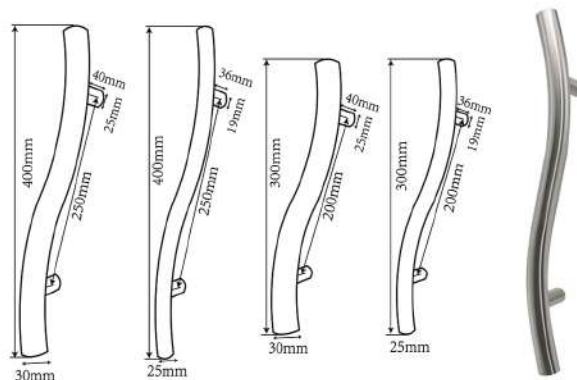


Glass Door Handle

MODEL:112


Material: stainless steel

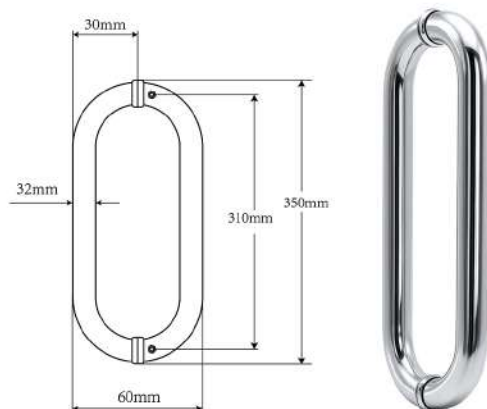


Glass Door Handle
MODEL: 100-25mm
Material: stainless steel.

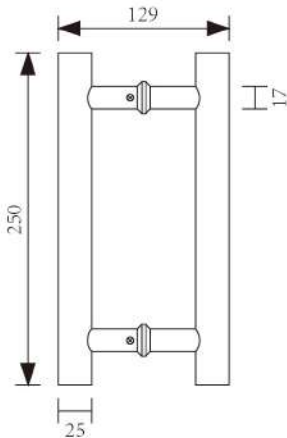


Glass Door Handle
MODEL: 100-30mm
Material: stainless steel.

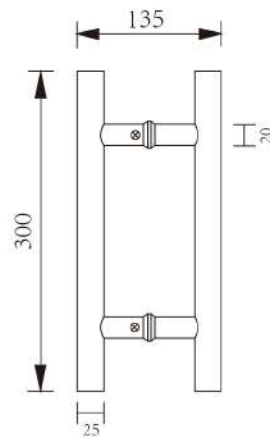

Glass Door Handle
MODEL: 102-30mm
Material: stainless steel.

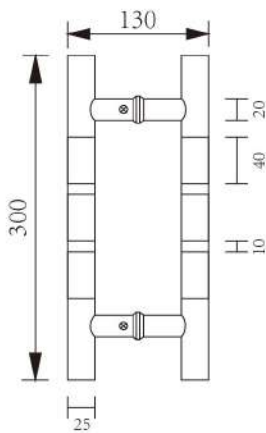

Glass Door Handle
Material: stainless steel.

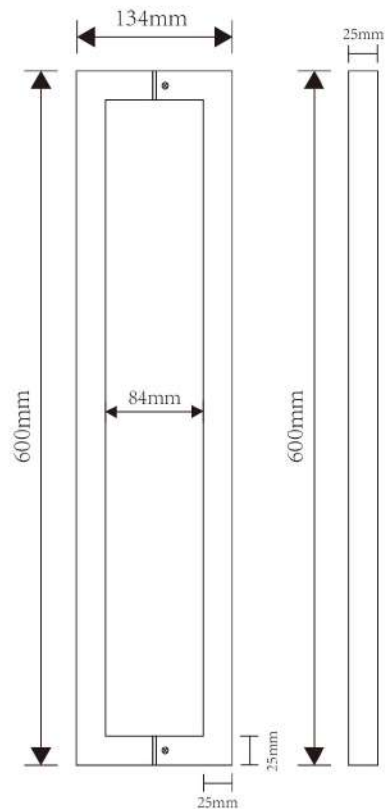

Glass Door Handle
Material: stainless steel.

